


PC'S LIMITED, INC.

28608L/AT122

Processor	80286
Processor Speed	10MHz
Chip Set	C & T
Max. Onboard DRAM	1MB
Cache	None
BIOS	PC's Ltd.
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80287

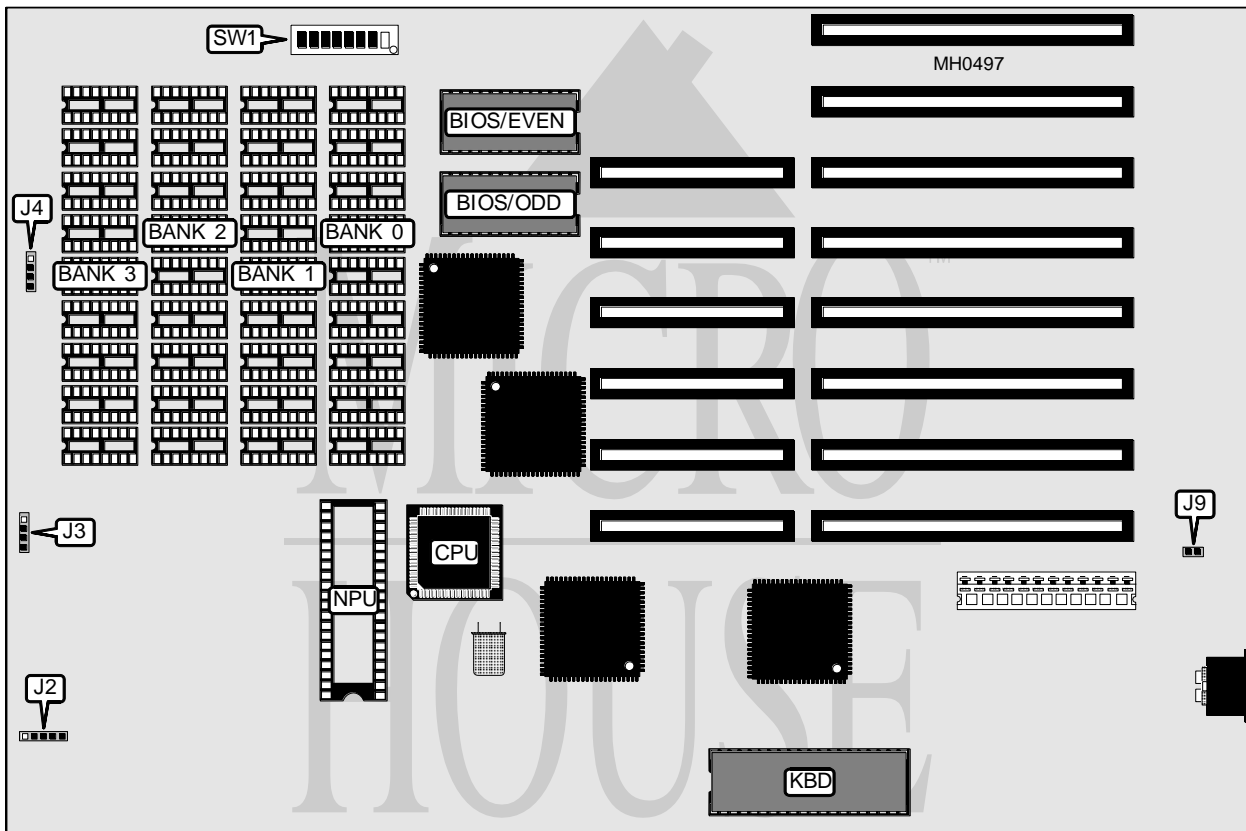

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J2	External battery	J4
Speaker	J3	Reset switch	J9

Continued on next page . . .

PC'S LIMITED, INC.
28608L/AT122

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Monitor type select color	SW1/1	On
Monitor type select monochrome	SW1/1	Off
í Green display LED indicates CPU speed (on = fast)	SW1/2	On
Green display LED indicates power on	SW1/2	Off
í BIOS type select 27256	SW1/3	On
BIOS type select 27128	SW1/3	Off
í Factory configured - do not alter	SW1/4	Off
í Factory configured - do not alter	SW1/5	Off
í 1024 DRAM split as 512K base, 512K extended	SW1/6	Off
1024 DRAM split as 640K base, 384K extended	SW1/6	On

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256KB	(9) 41256	NONE	NONE	NONE
512KB	(9) 41256	(9) 41256	NONE	NONE
640KB	(9) 41256	(9) 41256	(9) 4164	(9) 4164
1MB	(9) 41256	(9) 41256	(9) 41256	(9) 41256

DRAM SWITCH CONFIGURATION		
Size	SW1/7	SW1/8
256KB	On	Off
512KB	On	open
640KB	Off	Off
1MB	Off	open